




Global Greenhouse Gas Observation by Satellite

GOSAT

Project

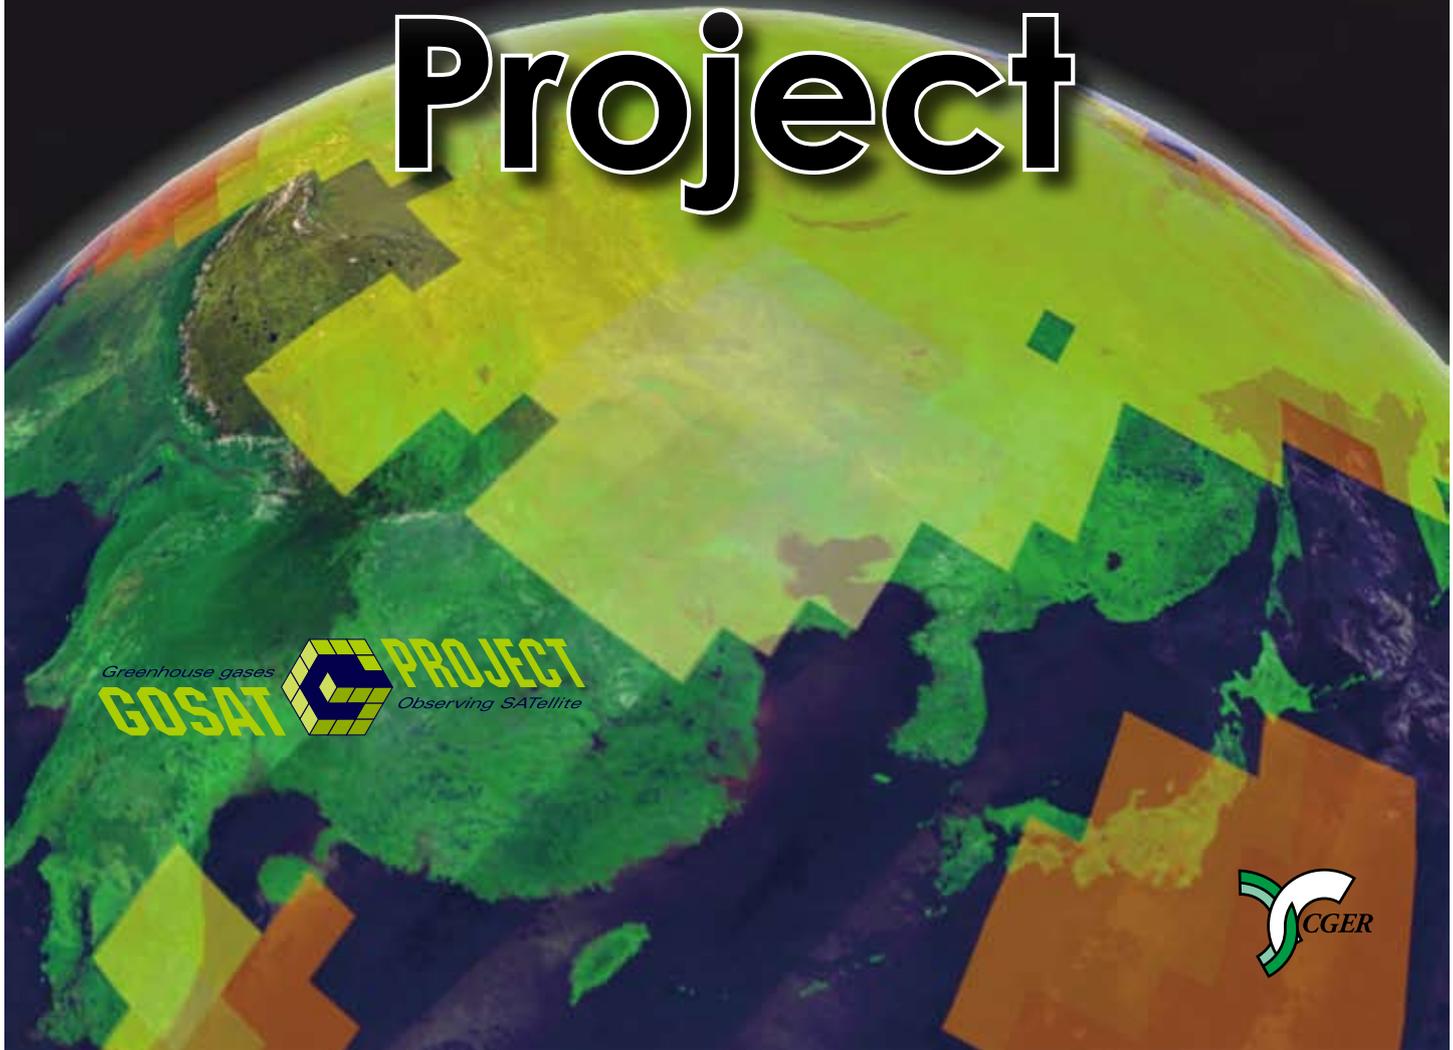

Greenhouse gases
GOSAT PROJECT
Observing SATellite



Greenhouse gases Observing SATellite



Figure 1. Exterior view of GOSAT (©JAXA)

The Greenhouse Gases Observing Satellite “IBUKI” (GOSAT) is the world’s first spacecraft to measure the concentrations of carbon dioxide and methane, the two major greenhouse gases, from space (Figure 1). The spacecraft was launched successfully on January 23, 2009, and has been operating properly since then.

Through analyzing the GOSAT observational data, scientists will be able to ascertain the global distribution of carbon dioxide (CO₂) and methane (CH₄), and how

the sources and sinks of these gases vary with seasons, years, and locations. These new findings will enhance scientific understanding on the causes of global warming. Also, they will serve as fundamental information for improving climate change prediction and establishing sound plans for mitigating global warming.

The GOSAT Project is a joint effort of the Ministry of the Environment (MOE), the National Institute for Environmental Studies (NIES), and the Japan Aerospace Exploration Agency (JAXA) (Figure 2).

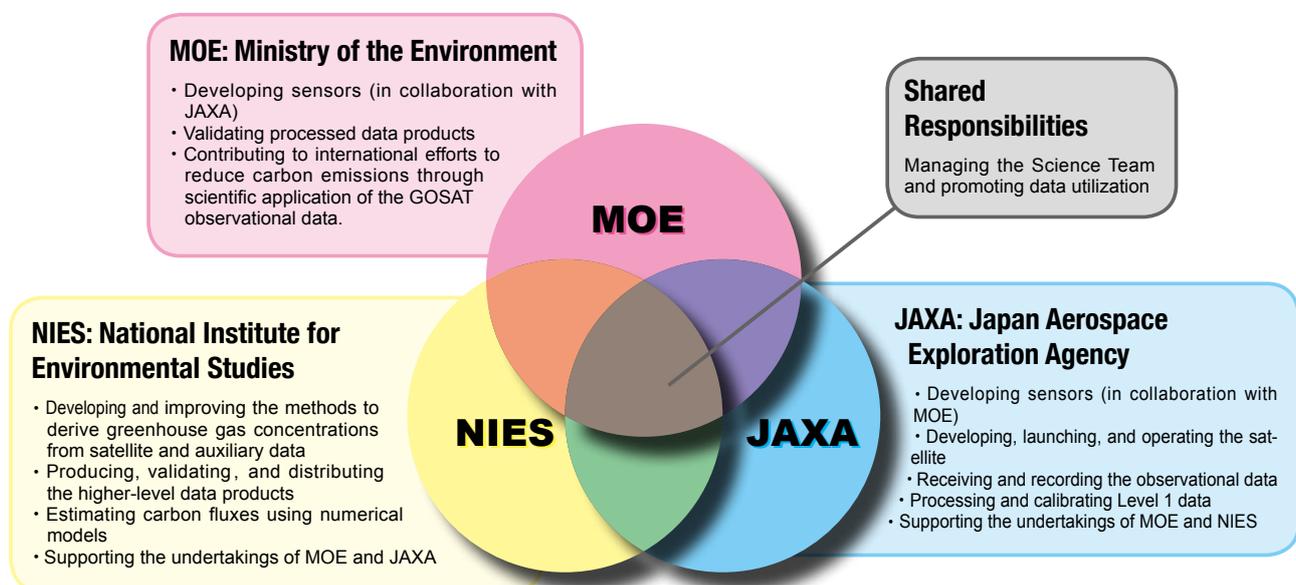


Figure 2. Role Sharing in the GOSAT Project.

1

Goals of the GOSAT Project

Due to mass consumption of fossil fuels in the expansion of industrial activities, worldwide emissions of CO_2 increased considerably during the past century. As shown in Figure 3, atmospheric CO_2 concentrations are rising very rapidly. CO_2 has a potential to warm the atmosphere and hence an increase in the concentrations leads to a rise in atmospheric temperatures. CO_2 and other chemical compounds, such as CH_4 , nitrous oxide, and halocarbons, are designated as greenhouse gases that are subject to emission regulations under the Kyoto Protocol. CO_2 and CH_4 together account for over 80 percent of the total warming effect caused by these gases (Figure 4). The increased amount of greenhouse gases in the atmosphere is thought to cause not only rises in global average temperatures but also severe droughts in dry regions and frequent floods in rainy areas. Such climatic changes may result in enormous damages.

For these reasons, the international community is moving toward reducing greenhouse gas emissions. In the Kyoto Protocol under the United Nations Framework Convention on Climate Change, emissions reduction targets for developed nations were agreed in 1997 and came into effect in February 2002. For promoting greenhouse gas reductions worldwide, it is essential to set rational reduction goals based on sure projections of climate change and its potential influences. At the same time, it is important to obtain accurate information on greenhouse gas emissions on a national basis and evaluate emissions reduction measures based on that knowledge.

The primary purpose of the GOSAT Project is to estimate emissions and absorptions of the greenhouse gases on a subcontinental scale (several thousand kilometers square; see Figure 5 for an example) more accurately and to assist environmental administration in evaluating the carbon balance of the land ecosystem and making assessments of regional emissions and absorptions. Through analyzing the GOSAT data, scientists will accumulate new knowledge on the global distribution and temporal variation of the greenhouse gases, as well as the global carbon cycle and its influence on climate. These new findings will be utilized for predicting future climate change and assessing its impact. The Project also aims to expand existing earth observing satellite technologies, develop new methodologies for greenhouse gas measurement, and promote technological development necessary for future earth-observing satellites.

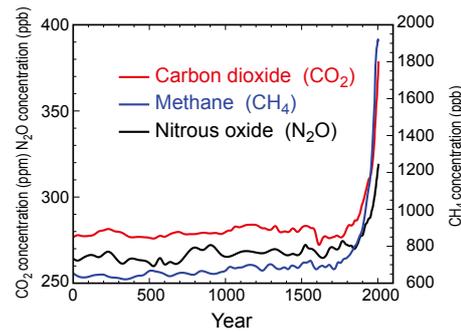


Figure 3. Changes in atmospheric concentrations of primary greenhouse gases. (Source: IPCC Fourth Assessment Report)

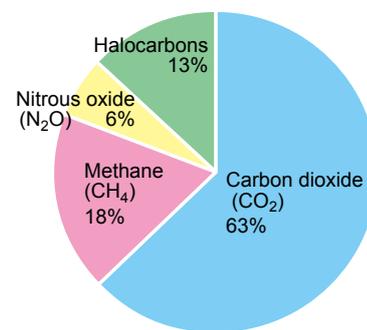


Figure 4. Contributions of primary greenhouse gases to the increase in atmospheric temperatures. The above figures are based on the best estimates of radiative forcing from 1750 to 2005. (Source: IPCC Fourth Assessment Report)

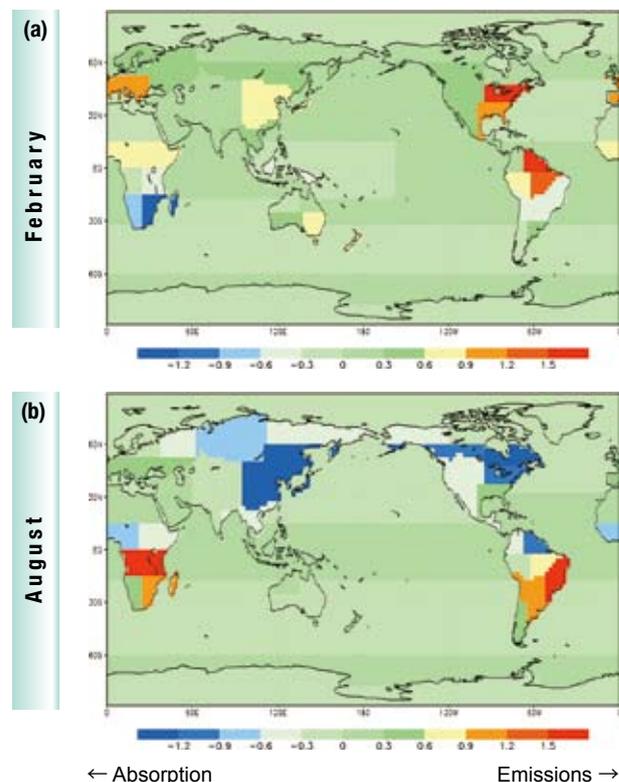


Figure 5. Sample simulation of global CO_2 sources and sinks ($\text{gC}/\text{m}^2/\text{day}$). a) February; b) August

2

GOSAT Instruments and Observational Methods

GOSAT observes infrared light reflected and emitted from the earth's surface and the atmosphere. Column abundances of CO₂ and CH₄ are calculated from the observational data. The column abundance of a gas species is expressed as the number of the gas molecules in a column above a unit surface area.

GOSAT flies at an altitude of approximately 666 km and completes one revolution in about 100 minutes. The satellite returns to the same point in space in three days (Figure 6). The observation instrument onboard the satellite is the Thermal And Near-infrared Sensor for carbon Observation (TANSO). TANSO is composed of two subunits: the Fourier Transform Spectrometer (FTS) and the Cloud and Aerosol Imager (CAI). Tables 1 and 2 summarize the target gas species, spectral coverage, and other specifications of these two instruments.

FTS is an instrument that utilizes optical interference. Within the instrument the incoming light is split into two beams which propagate in separate optical paths to create an optical path difference between the two. These beams are then recombined to cause interference. FTS measures the intensity of the interference by continuously changing the optical path difference. A spectrum, which is distribution of light intensity over a span of wavelength, is obtained via performing mathematical operation called the Fourier transform on that measured data.

FTS observes sunlight reflected from the earth's surface and light emitted from the atmosphere and the surface. The former is observed in the spectral bands 1 through 3 of FTS in the daytime, and the latter is captured in band 4 during both the day and the night. Prior to reaching the detectors of the instrument, the light in the bands 1 through 3 is split into two orthogonally-polarized components (P and S components) and measured independently. The light in the band 4, however, is not split. The instrument thereby observes the incoming light in seven different channels. The reflection character of sunlight over land and that of over water differ significantly. Observation of reflected light over the surfaces of oceans and lakes is difficult since the water absorbs sunlight. The water, however, reflects sunlight specularly in cer-

tain directions. The instrument thus targets such points when observing over large water surfaces.

CAI visualizes the state of the atmosphere and the ground surface during the daytime. The image data from CAI are used to determine the cloud existence over an extended area that includes the FTS's field of view (FOV). When clouds and aerosols are detected in FOV, cloud characteristics and aerosol amounts are calculated. The information is used to correct the effects of the clouds and the aerosols on the spectra obtained with FTS.

Over the three-day period, FTS takes fifty-six thousand measurements, covering the entire globe. Since the analysis is limited to areas under clear sky conditions, only two to five percent of the data collected are usable for calculating column abundances of CO₂ and CH₄. Nevertheless, the number of data point significantly surpasses the current number of ground monitoring stations, which is about 200. GOSAT serves to fill out the blanks in the ground observation network.

Table 1. Specifications of FTS

	Band 1	Band 2	Band 3	Band 4
Spectral coverage (μm)	0.758-0.775	1.56-1.72	1.92-2.08	5.56-14.3
Spectral resolution (cm ⁻¹)	0.2	0.2	0.2	0.2
Polarized light observation	Performed	Performed	Performed	Not Performed
Targeted gases	O ₂	CO ₂ · CH ₄	CO ₂ · H ₂ O	CO ₂ · CH ₄
Angle of instantaneous field of view	15.8 mrad.(corresponds to 10.5 km when projected on the earth's surface)			
Time necessary for a single scanning (sec.)	4.0 , 2.0 , or 1.1 (depending on the scanning mode being used)			

* 1 μm = 1/1000 mm

Table 2. Specifications of CAI

	Band 1	Band 2	Band 3	Band 4
Spectral coverage (μm)	0.370-0.390 (0.380)	0.664-0.684 (0.674)	0.860-0.880 (0.870)	1.56-1.65 (1.60)
Targeted substances	Cloud and aerosol			
Swath (km)	1000	1000	1000	750
Spatial resolution at nadir (km)	0.5	0.5	0.5	1.5




Figure 6. Left: schematic illustration of how GOSAT makes observations. Center: locations of ground-based monitoring stations (source: World Data Centre for Greenhouse Gases). Right: GOSAT's footprint in three days (44 revolutions).

3

Methods of Analyzing GOSAT Data

Data obtained with FTS and CAI are processed in a flow shown in Figure 7. Absorption spectra are obtained from the FTS observational data. The CAI data provide information on clouds and aerosols. These data are used together to calculate column abundances of CO₂ and CH₄ over observation points where interferences of clouds and aerosols are small. CO₂ sources and sinks as well as three-dimensional CO₂ distributions are estimated using a global atmospheric transport model.

The molecules of CO₂ and CH₄ in the atmosphere absorb light of particular wavelengths. Hence, the amounts of CO₂ and CH₄ in an optical path can be calculated through measuring how much light is absorbed by these molecules. Figure 8 shows an example of absorption spectra that are obtained with FTS. The sawtoothed feature in the spectra indicates light absorption by gases such as CO₂ and CH₄, and the depression depth correlates with column abundances.

The spectral data are analyzed as follows. Among all spectra obtained with FTS, only those measured under no cloud interference within FOV are selected for further processing. This screening uses the images from CAI. Based on the absorption characteristics of the gases, the selected spectra are analyzed, using a numerical calculation scheme called the retrieval method, to calculate column abundances of CO₂ and CH₄. Changes in CO₂ concentration are most obvious near the surface of the earth. The CO₂ absorption bands near 1.6 μm and 2.0 μm are important since absorptions in these bands

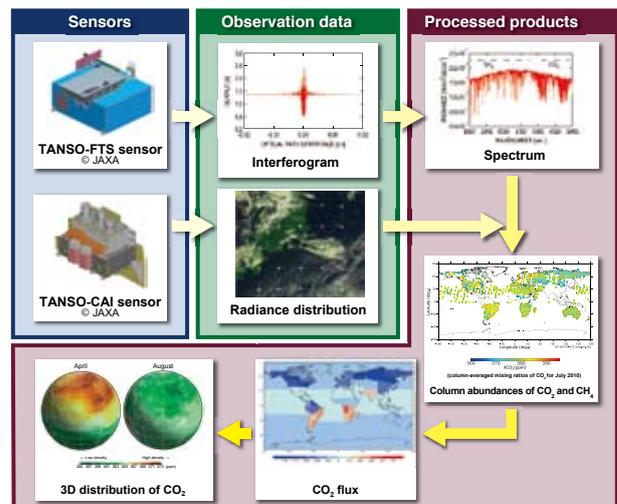


Figure 7. Outline of GOSAT data processing

provide information on the near-surface concentrations. The absorption band around 14 μm is used for obtaining information mainly at altitudes above 2 km.

The column abundances of CO₂ and CH₄ are then averaged on a monthly or seasonal basis and processed into global distribution maps. The CO₂ global distribution data are used in the estimation of CO₂ sources and sinks on a subcontinental scale (Figure 5). The sources and sinks are calculated by performing inverse simulations using an atmospheric transport model.

The current estimation of CO₂ sources and sinks relies solely on ground-based observational data. Estimation errors are particularly large in Siberia, Asia, Africa, and South America where ground monitoring stations are located sparsely. GOSAT is capable of collecting observational data consistently over the clear-sky regions of the globe and hence is expected to reduce errors in the estimates of CO₂ sources and sinks. Further, using these CO₂ source and sink distribution data and the atmospheric transport model, the global distributions of CO₂ in three dimensions are simulated.

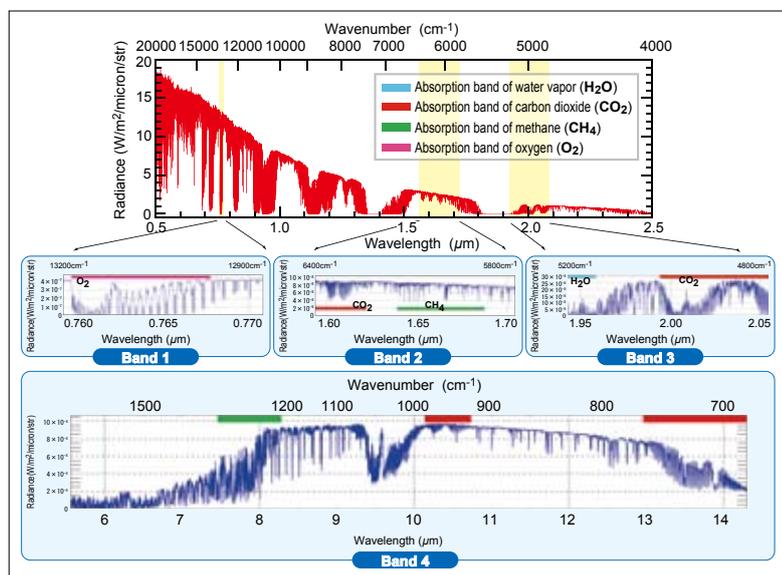


Figure 8. Sample of FTS radiance spectra showing absorption bands of CO₂ and CH₄. Shown in the top panel is a model-simulated spectrum. Panels below present FTS Level 1B radiance spectra (explained in Chapter 5).

4 Data Processing and Data Product Distribution

The GOSAT observational data are routinely processed at the GOSAT Data Handling Facility, and the data products are distributed to general users through the GOSAT data product distribution website.

The development of the GOSAT Data Handling Facility (GOSAT DHF) was completed in late 2008, and NIES has been maintaining it for the routine processing of the GOSAT data (Figure 9). Besides being the central resource for data processing, GOSAT DHF is used to collate requests for targeted measurements sent from the qualified researchers (explained in Chapter 7). The organized requests are transferred to JAXA and incorporated in the GOSAT observation plan. JAXA then operates the satellite according to the plan.

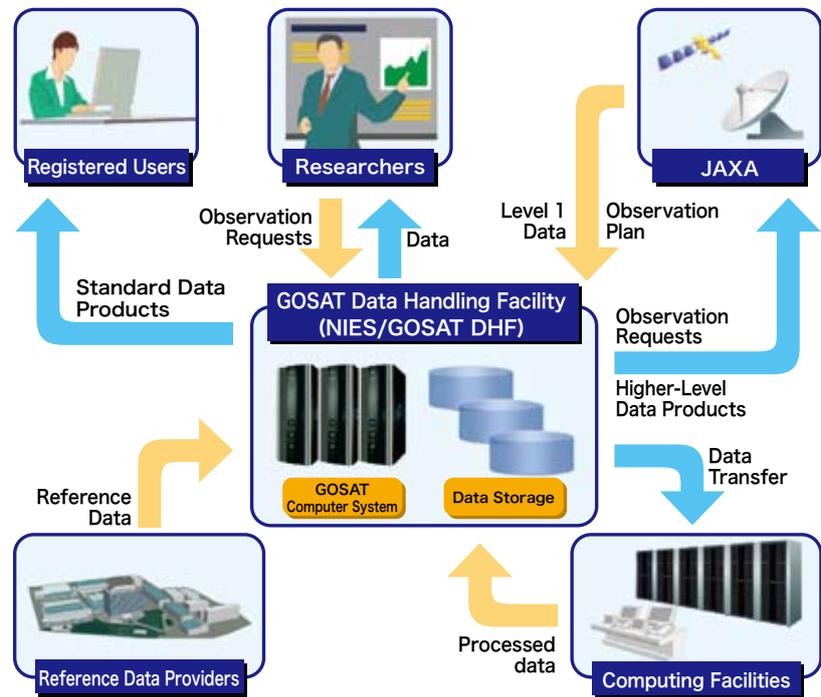


Figure 9. Workflow of GOSAT data processing.

The FTS and CAI data that the satellite has collected are received and processed at JAXA Tsukuba Space Center first. Then, these data are transferred to GOSAT DHF via Tsukuba WAN, a high-speed wide area network in Tsukuba. GOSAT DHF gathers reference data, such as meteorological data necessary for the higher-level data processing, from cooperating institutions on a regular basis. Using these reference data, the observational data from JAXA are processed into column abundances of CO₂ and CH₄, CO₂ sources and sinks, and CO₂ three-dimensional distributions. The data processing is performed in conjunction with other external computing resources. Reference data used for validating the data products are also stored in this facility. All together, the amount of the data to be archived during the satellite's five-year operation period will be around 400 terabytes.

The GOSAT data products are distributed through the GOSAT User Interface Gateway (GUIG), a website for GOSAT data distribution (Figure 10). Prior user reg-



Figure 10. GOSAT User Interface Gateway.

(<http://data.gosat.nies.go.jp/>)

istration is required for accessing the data products, and it can be done on the User Authentication page reached from the Product & Service page of GUIG. Details on the data products are listed in Chapter 5.

5

GOSAT Data Products

Data products distributed from GOSAT DHF

Table 3 lists all types of the GOSAT data products provided for general users. The Level 1 data (FTS Level 1B, CAI Level 1B, and CAI Level 1B+ data) contain spectra and radiances acquired by the satellite. The higher level data products (FTS Level 2, CAI Level 2, FTS Level 3, CAI Level 3, Level 4A, and Level 4B data products) store retrieved physical quantities such as the atmospheric concentrations of CO₂ and CH₄. Among

these, only the data products whose uncertainties have been evaluated in our instrument calibration and data validation activities (Level 1 and some of Level 2 and Level 3 data products) are now open to the general users. Other data products are under preparation. Data users can search and order these data products by accessing GUIG (Figure 10). Tools for reading the data products are available on the Technical Information page of the GOSAT website (<http://www.gosat.nies.go.jp/>).

Table 3. List of GOSAT data products distributed from GOSAT DHF to general users. The data products underlined are currently available (as of February 2012)

Product Level	Sensor / Band	Product Designation	Description	Product Provision Unit	Data Format
L1B	FTS	<u>FTS L1B data</u>	Radiance spectral data obtained by performing Fourier transform on interferogram data	per FTS scene	HDF5
	CAI	<u>CAI L1B data</u>	Radiance data (band-to-band and geometric corrections applied / data mapping not performed)	per CAI frame	
L1B+	CAI	<u>CAI L1B+ data</u>	Radiance data (band-to-band and geometric corrections applied / data mapping performed)		
L2	FTS SWIR	<u>L2 CO₂ column amount (SWIR)</u>	CO ₂ column abundance data retrieved from SWIR radiance spectral data	can be selected	HDF5
		<u>L2 CH₄ column amount (SWIR)</u>	CH ₄ column abundance data retrieved from SWIR radiance spectral data		
	FTS TIR	L2 CO ₂ profile (TIR)	CO ₂ vertical profile data retrieved from TIR radiance spectral data		
		L2 CH ₄ profile (TIR)	CH ₄ vertical profile data retrieved from TIR radiance spectral data		
CAI	<u>L2 cloud flag</u>	Cloud coverage data	per CAI frame		
L3	FTS SWIR	<u>L3 global CO₂ distribution (SWIR)</u>	CO ₂ column-averaged mixing ratio data projected on a global map	per month (global)	
		<u>L3 global CH₄ distribution (SWIR)</u>	CH ₄ column-averaged mixing ratio data projected on a global map		
	FTS TIR	L3 global CO ₂ distribution (TIR)	CO ₂ concentrations at each vertical level projected on a global map		
		L3 global CH ₄ distribution (TIR)	CH ₄ concentrations at each vertical level projected on a global map		
	CAI	<u>L3 global radiance distribution</u>	Global radiance distribution data (3 days' worth, including data for cloudy segments)	per 3 days (global)	
<u>L3 global reflectance distribution (clear-sky)</u>		Clear-sky reflectance data (composed only of clear-sky segments selected from a month's worth of data)			
L3 NDVI		Vegetation index global distribution data (with cloudy meshes flagged)	per 15 days - Rectangle (30° × 60° (lat. × lon.))		
L4A	-	L4A global CO ₂ flux	CO ₂ flux per each of 64 global regions (monthly average)	per year (64 regions)	Text/ NetCDF
L4B	-	L4B global CO ₂ distribution	Three-dimensional global distribution of CO ₂ concentration	per month 2.5° × 2.5° grid (lat. × lon.)	NetCDF

Notes:

- 1) The details on the data processing flow are presented in Chapter 3.
- 2) SWIR and TIR stand for Short-Wavelength InfraRed and Thermal InfraRed, respectively. SWIR radiations are detected in the bands 1, 2, and 3 of FTS, and the band 4 captures TIR.
- 3) An FTS scene and a CAI frame are equivalent to 1/60 of one orbital revolution.
- 4) HDF5 and netCDF are the types of the data file format used for distributing the data products. HDF5 : Hierarchical Data Format version 5 ; netCDF: Network Common Data Form.
- 5) NDVI: Normalized-difference vegetation index

Level 1B and 1B+ data

The FTS Level 1B data (Figure 8) are radiance spectra that are obtained by performing the Fourier transformation on the signals detected by FTS. The degrees to which the targeted gas species absorb the reflected and emitted light in each of the spectral bands can be seen. A single data file of the FTS Level 1B data contains the radiance spectra obtained during 1/60 of an orbital revolution (defined as “one scene”).

The CAI Level 1B data (Figure 11) are pixel-by-pixel radiances obtained by multiplying the digital image data of CAI by conversion factors.

The CAI Level 1B+ data (Figure 12) carry the same Level 1B radiance data, but the geographical locations of the image pixels are corrected for the skewness caused by the topographical roughness of the ground surface and are projected onto a map of the earth via interpolation. A single data file of the CAI Level 1B and Level 1B+ data contains the radiance data obtained during 1/60 of an orbital revolution (defined as “one frame”).



Figure 11. CAI Level 1B data collected on July 17, 2010 over the vicinity of mainland Japan. The image was produced by assigning colors (blue, red, and green) to the bands 1, 2, and 3.

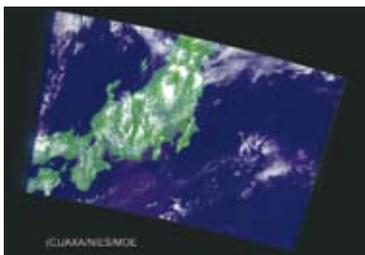


Figure 12. CAI Level 1B+ data collected on July 17, 2010 over the vicinity of mainland Japan. This image was produced by assigning colors (blue, red, and green) to the bands 1, 2, and 3.

Level 2 data products

The FTS SWIR Level 2 data products store the column abundances of CO₂ and CH₄ retrieved from the radiance spectra in the band 1 through 3 of FTS. The column abundance of a gas species is defined as the number of the gas molecule in a vertical unit column stretching from the ground surface to the top of the atmosphere. Figures 13 and 14 show the column-averaged mixing ratios of CO₂ and CH₄. The column-averaged mixing ratio of a gas species is given by dividing the column abundance of the gas by that of dry air. For improving the quality of the data products, the Level 2 data processing algorithm is being updated. The validation of the Level 2 data products is also ongoing (explained in Chapter 6).

The FTS TIR Level 2 data products are vertical concentration profiles of CO₂ and CH₄ derived from the radiance spectra in the band 4 of FTS.

The Level 2 cloud flag data product (Figure 15) stores the clear-sky confidence levels that are calculated from the CAI Level 1B data.

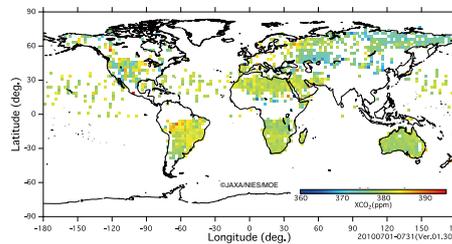


Figure 13. Sample of FTS SWIR Level 2 CO₂ column abundance (column-averaged mixing ratios of CO₂ in 2.5 deg mesh) for July 2010 derived for cloud-free scenes. Blanks in white denote no available data.

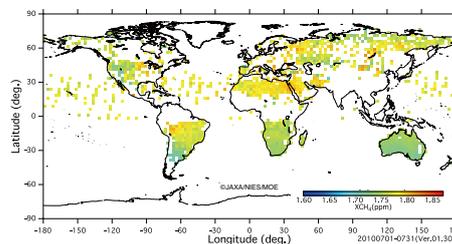


Figure 14. Sample of FTS SWIR Level 2 CH₄ column abundance (column-averaged mixing ratios of CH₄ in 2.5 deg mesh) for July 2010 derived for cloud-free scenes. Blanks in white denote no available data.




Figure 15. CAI Level 2 cloud flag for July 17, 2010, overlaid with CAI Level 1B data (see Figure 11). The areas in black indicate those covered by clouds.

Level 3 data products

The FTS SWIR Level 3 data products (Figures 16 and 17) store the monthly global distributions of CO₂ and CH₄ that are calculated from the FTS SWIR Level 2 column-averaged mixing ratios of CO₂ and CH₄. A geo-statistical calculation technique called Kriging method is applied to estimate values for blank regions in the FTS SWIR Level 2 distributions. Values gridded to 2.5-degree cells are provided.

The FTS TIR Level 3 data products are global maps of CO₂ and CH₄ at several pressure levels that are processed in the same manner as above. These data products can be utilized for visualizing the spatial variation of the greenhouse gases on a global scale.

The CAI Level 3 radiance distribution data product (Figure 18) is processed in a three-day recurrent cycle; the CAI radiance data collected during the three-day cycle are assembled to give a global cloud distribution map.

The CAI Level 3 global reflectance distribution (clear-sky) data product (Figure 19) shows the feature of the ground surface globally. These data are processed by selecting the least cloudy images from the CAI data collected in a month and consolidating them on a global

map.

The Level 3 normalized-difference vegetation index (NDVI) data are generated by contrasting the CAI radiances in band 3, which are sensitive to ground surface vegetations, to those in band 2, which are less sensitive to the vegetations.

Level 4 data products

The Level 4A data product shows monthly CO₂ source/sink strengths (fluxes) in 64 global regions that are inversely estimated from the FTS SWIR Level 2 column-averaged mixing ratios and ground-based observational data using a global atmospheric transport model.

The Level 4B data product presents global CO₂ concentrations in three dimensions calculated from the Level 4A data product by using the atmospheric transport model. The data product has a horizontal resolution of 2.5°×2.5° and a time step of six hours.

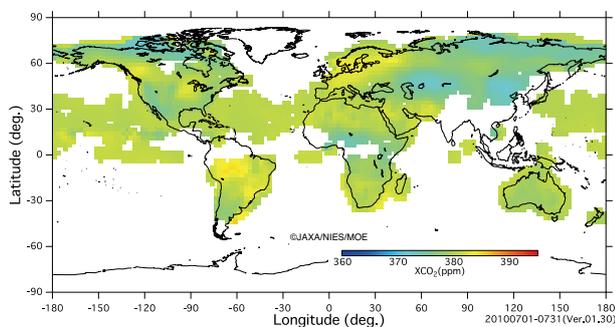


Figure 16. FTS SWIR Level 3 global CO₂ distribution for July 2010 (in 2.5 deg mesh). Blanks in white denote data grids more than 500 km away from the nearest GOSAT scans.

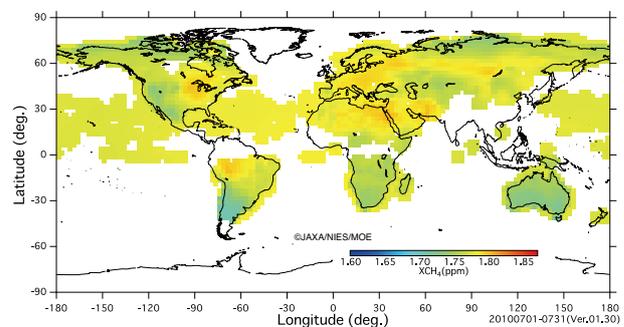


Figure 17. FTS SWIR Level 3 global CH₄ distribution for July 2010 (in 2.5 deg mesh). Blanks in white denote data grids more than 500 km away from the nearest GOSAT scans.

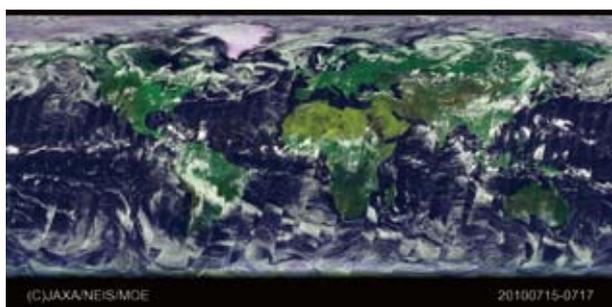


Figure 18. CAI Level 3 global radiance distribution obtained between July 15 and 17, 2010. This image was produced by assigning colors (blue, red, and green) to the bands 1, 2, and 3.



Figure 19. CAI Level 3 global reflectance distribution (clear-sky) synthesized from cloud-free data obtained between July 1 and 31, 2010. This image was produced by assigning colors (blue, red, and green) to the bands 1, 2, and 3.

6

Validation of GOSAT Data Products

In order for the GOSAT data products to be utilized meaningfully in the science community, uncertainties associated with the data products need to be clarified through validation. High-precision data obtained independently by ground-based instruments and aircrafts are used to validate the data products. Improvements in the data processing algorithms are made based on the validation results.

Validation of the GOSAT data products acquired through the routine processing of the GOSAT observational data (Figure 7) is necessary in order for the data products to be used meaningfully in the science community. The precision and bias of the data products must be clarified. To this end, the GOSAT data validation team has been utilizing high-precision reference data obtained through ground-based and airborne measurements (Figure 20). For validating the Level 2 column abundances of CO₂ and CH₄, the team uses data from ground-based high-resolution Fourier transform spectrometers and in-situ observation instruments installed on aircrafts. Properties of clouds and aerosols calculated in the routine data processing are checked against the data obtained with remote sensing instruments such as ground-based sky radiometers and lidars. The estimated source/sink strengths and three-dimensional distributions of CO₂ are also planned to be evaluated.

The data validation team has carried out a series of initial data validation activities and compared the Level 2 data products to the ground-based and airborne reference data. Figure 21 shows the sounding locations of the ground-based high-resolution Fourier transform spectrometers in the Total Carbon Column Observing Network and those operating independently. Data obtained in Japan, Europe, Oceania, and North America were used in these validation activities. Also, data collected by the aircrafts of Japan Airlines that participate in CONTRAIL (Comprehensive Observation Network for Trace gases by Airliner) project and the US National Oceanic and Atmospheric Administration's air-

borne measurement program were employed. The results of the comparison (as of March 2010) indicated that the retrieved Level 2 CO₂/CH₄ column abundances were lower than the reference values. The latitudinal pattern of the Level 2 zonal means, however, were broadly consistent with those of the reference values. The data product validation activity will continue in the days to come, and the results acquired will be reflected in the improvement of the data processing algorithms.

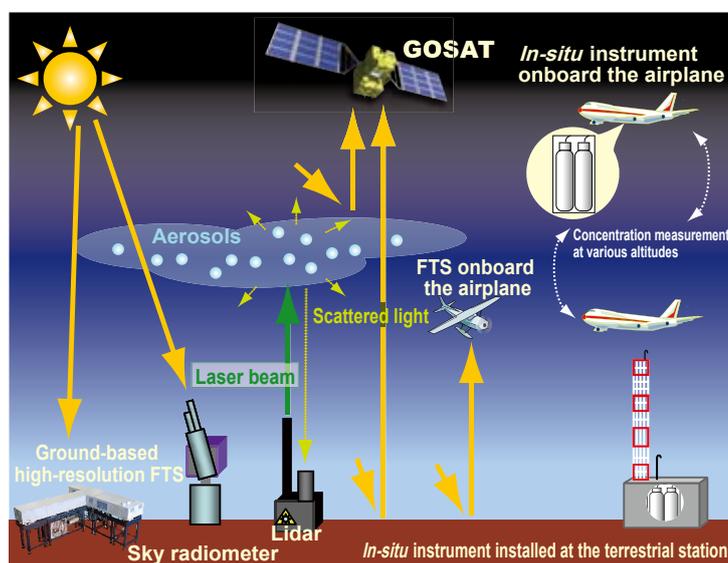


Figure 20. Schematic illustration of the data product validation experiment

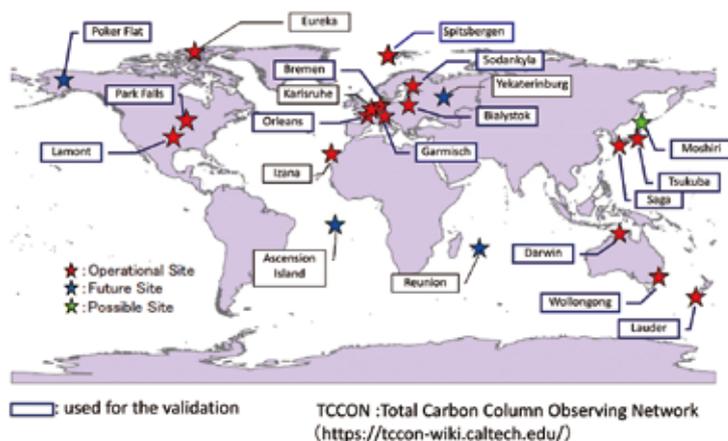


Figure 21. Sounding locations of the ground-based high-resolution Fourier transform spectrometers in the Total Carbon Column Observing Network and those operating independently.

7

Project Information and Research Announcements

The latest information is posted on the GOSAT Project website and in the Project's monthly newsletter. The newsletter is available on the website. The GOSAT Project solicited research proposals from scientists around the world to further active use of the GOSAT data.

The website of the GOSAT Project (Figure 22) posts the latest news in the Project as well as other information such as technical details, project results, and GOSAT research announcements. The NIES GOSAT PROJECT NEWSLETTER (Figure 23) is released on the website. Data users can search and order the GOSAT data products at GUIG, the GOSAT data product distribution site. There, the users can also view selected data products plotted on global maps.

Through three research announcements, the GOSAT Project solicited research proposals from scientists worldwide. Proposals were solicited in the following five research areas: instrument calibration, data

processing algorithm development, carbon balance estimation and atmospheric transport modeling, data validation, and data application. A total of 106 proposals (52 in 2008, 36 in 2009, and 18 in 2010) were selected (Table 4). The outlines of the proposals already selected are posted on the Project website (<http://www.gosat.nies.go.jp/eng/proposal/proposal.htm>). Scientists not only in Japan but also around the world responded to the research announcements, showing active interests in the Project. Table 5 shows the number of selected research proposals per nation. Some of important outcomes brought about by the selected researches will be reflected in the routine processing of the GOSAT observational data. Three meetings of the principal investigators of the selected research proposals were held in November 2008 in Tokyo, January 2010 in Kyoto, and May 2011 in Edinburgh, UK to share the latest information on the ongoing researches and exchange views and opinions.



Figure 22. Top page of GOSAT Project website (<http://www.gosat.nies.go.jp/>)



Figure 23. NIES GOSAT PROJECT NEWSLETTER

Table 4. Number of selected research proposals per research area.

	2008	2009	2010	Total
Calibration	4	0	0	4
Data Processing Algorithm	11	7	2	20
Data Validation	15	7	1	23
Source-Sink Estimation	6	8	3	17
Data Application	16	14	9	39
Data Application / Validation	0	0	2	2
Source-Sink Estimation / Data Application	0	0	1	1
Total	52	36	18	106

Table 5. Number of selected research proposals per nation.

Country	2008	2009	2010	Total
Japan	23	8	1	32
USA	7	8	3	18
Germany	6	2		8
Canada	3		2	5
France	2	2	1	5
Netherlands	3	1	1	5
UK	2	3		5
Russia	4			4
China	1		2	3
Finland		2	1	3
Australia			2	2
India		1	1	2
Italy		2		2
Korea		1	1	2
Spain		1	1	2
Belgium		1		1
Brazil		1		1
Czech		1		1
Indonesia			1	1
New Zealand	1			1
Norway		1		1
Singapore		1		1
Taiwan			1	1
Total	52	36	18	106

8 Organization and Plans

GOSAT has been operating properly since the spacecraft was placed in orbit on January 23, 2009. The initial calibration and validation of the instruments on-board started three months later, and the routine observation has been continued since July 28. The distribution of the Level 1 data to the general public was initiated on October 29 of the same year. This was followed by the release of the Level 2 and Level 3 data products in 2010.

A project unit in NIES carries out the GOSAT Project (Figure 24). This unit implements the primary tasks of the GOSAT Project, which include developing algorithms for calculating column abundances of CO₂ and CH₄ from the GOSAT observational data, validating and evaluating the results, and developing and improving numerical models for estimating the sources and sinks of CO₂. The unit also operates GOSAT DHF and provides information to data users (Chapter 4).

The Project is now preparing the Level 4 and other higher level data products that have not been released yet. For updating the released data products, the Project will continue the tasks of renewing the data processing

algorithm, processing and re-processing the observational data with the updated algorithms, and validating the acquired data products.

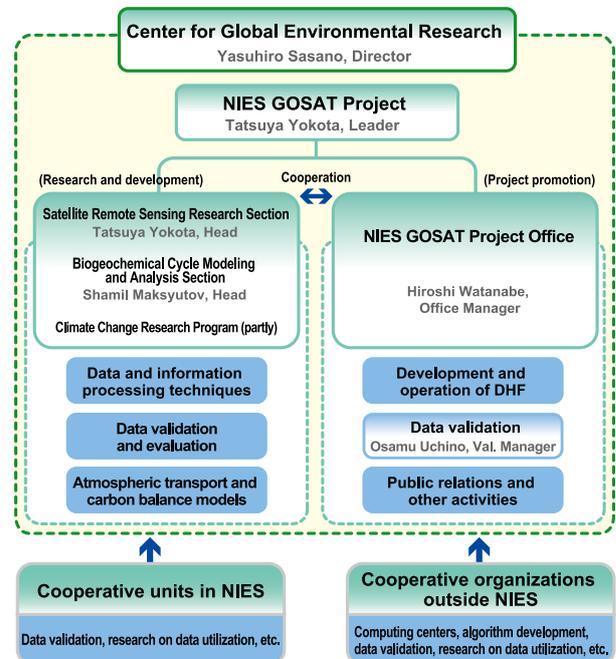


Figure 24. NIES GOSAT Project organization (as of February 2012).



Ministry of the Environment
環境省



National Institute for Environmental Studies
独立行政法人 国立環境研究所



Japan Aerospace Exploration Agency
独立行政法人 宇宙航空研究開発機構

For more information, please contact:

GOSAT Project Office
Center for Global Environmental Research
National Institute for Environmental Studies
16-2 Onogawa, Tsukuba-shi, Ibaraki
305-8506 Japan
TEL: +81-29-850-2966 FAX: +81-29-850-2219
E-mail: gosat-prj1@nies.go.jp
URL: http://www.gosat.nies.go.jp/index_e.html

● For inquiries on the distribution of the GOSAT data products, please visit our website at...<http://data.gosat.nies.go.jp/> or contact us at.....gosat-support@nies.go.jp

Published by the Center for Global Environmental Research, National Institute for Environmental Studies

